


TYPE EVPP-D01

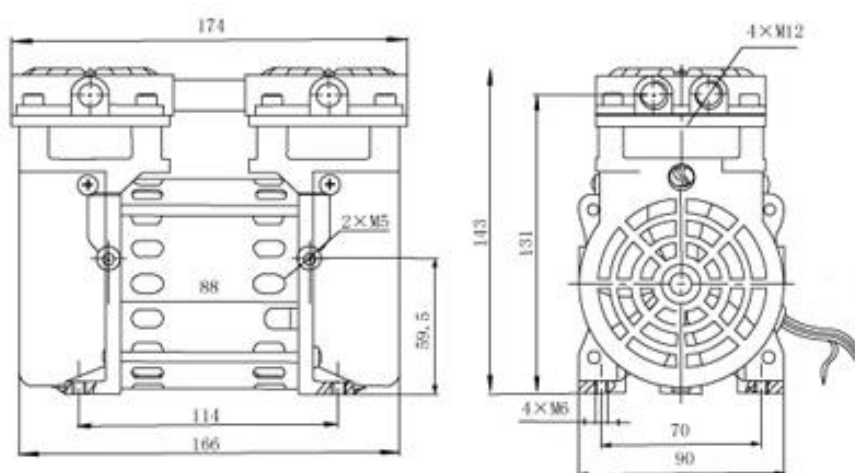


Technical Data		TYPE EVPP-D01	
		Vacuum	Pressure
Nominal displacement	l/m	40	40
Ultimate vacuum/pressure	bar	-0,88	+1,4
Motor power	W	95	130
Rotation speed @50Hz	rpm	1450	1390
Weight	kg	3,5	3,5
Noise (at ultimate pressure)	dB(A)	54	55
Admissible ambient temp.	°C	-5 to 40	-5 to 40
Connections	G(BSP)	1/4"	1/4"
Dimensions LxWxH	mm	174x91x143	174x91x143

Ordering Information	EVPP-D01	
EVPP-D01 with 230V, 50Hz motor	670.010	675.010
Damper G1/4"	670.900	
Accessories	See accessories page	

TYPE EVPP-D01-DC


Available in 12Volt DC and 24Volt DC

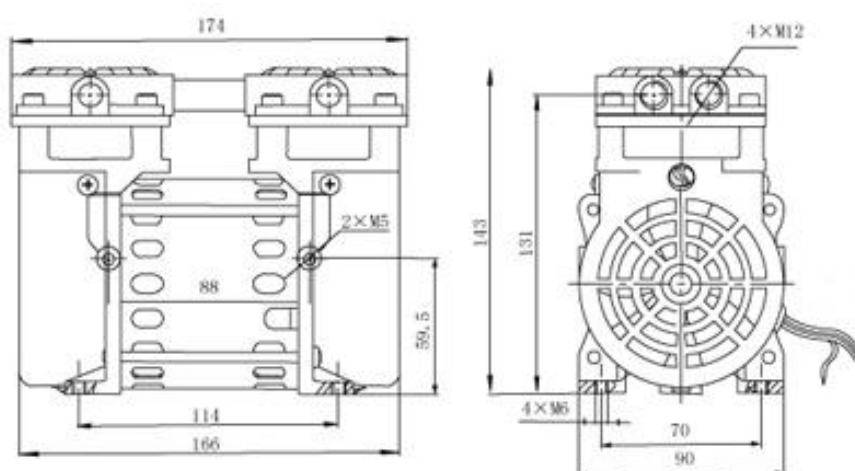

Technical Data		TYPE EVPP-D01-DC	
		Vacuum	Pressure
Nominal displacement	l/m	48	48
Ultimate vacuum/pressure	bar	-0,9	+2,0
Motor power	W	120	145
Rotation speed	rpm	1800	1700
Weight	kg	3,5	3,5
Noise (at ultimate pressure)	dB(A)	53	55
Admissible ambient temp.	°C	-5 to 40	-5 to 40
Connections	G(BSP)	1/4"	1/4"
Dimensions LxWxH	mm	174x91x143	174x91x143

Ordering Information	EVPP-D01-DC	
EVPP-D01 with 12 V DC motor	670.110	675.110
EVPP-D01 with 24 V DC motor	670.210	675.210
Damper G1/4"	670.900	
Accessories	See accessories page	

TYPE EVPP-D02

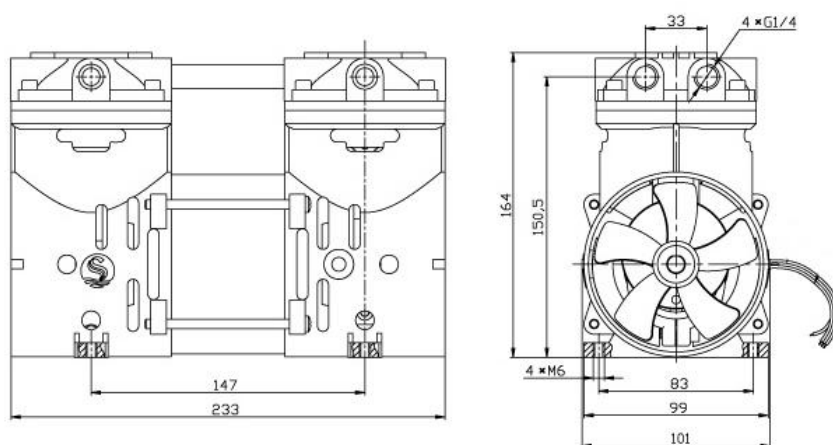


Technical Data		TYPE EVPP-D02	
		Vacuum	Pressure
Nominal displacement	l/m	81,7	81,7
Ultimate vacuum/pressure	bar	-0,92	+2,0
Motor power	W	210	300
Rotation speed @50Hz	rpm	1450	1400
Weight	kg	6,5	6,5
Noise (at ultimate pressure)	dB(A)	62	65
Admissible ambient temp.	°C	-5 to 40	-5 to 40
Connections	G(BSP)	1/4"	1/4"
Dimensions LxWxH	mm	233x101x164	233x101x164

Ordering Information	EVPP-D02	
EVPP-D02 with 230V, 50Hz motor	670.020	675.020
Damper G1/4"	670.900	
Accessories	See accessories page	

TYPE EVPP-D02-DC



Available in 12Volt DC and 24Volt DC

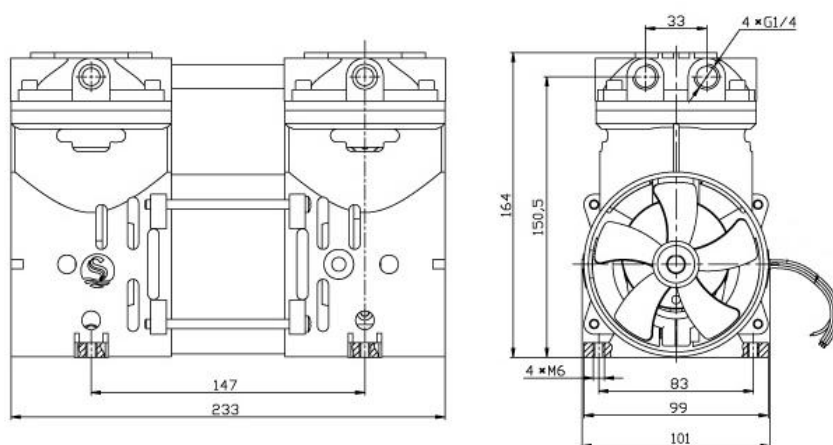

Technical Data		TYPE EVPP-D02-DC	
		Vacuum	Pressure
Nominal displacement	l/m	102	102
Ultimate vacuum/pressure	bar	-0,92	+2,0
Motor power	W	210	370
Rotation speed	rpm	1800	1750
Weight	kg	6,5	6,5
Noise (at ultimate pressure)	dB(A)	60	65
Admissible ambient temp.	°C	-5 to 40	-5 to 40
Connections	G(BSP)	1/4"	1/4"
Dimensions LxWxH	mm	233x101x164	233x101x164

Ordering Information	EVPP-D02-DC	
EVPP-D02 with 12 V DC motor	670.120	675.120
EVPP-D02 with 24 V DC motor	670.220	675.220
Damper G1/4"	670.900	
Accessories	See accessories page	



TYPE EVPP-D03

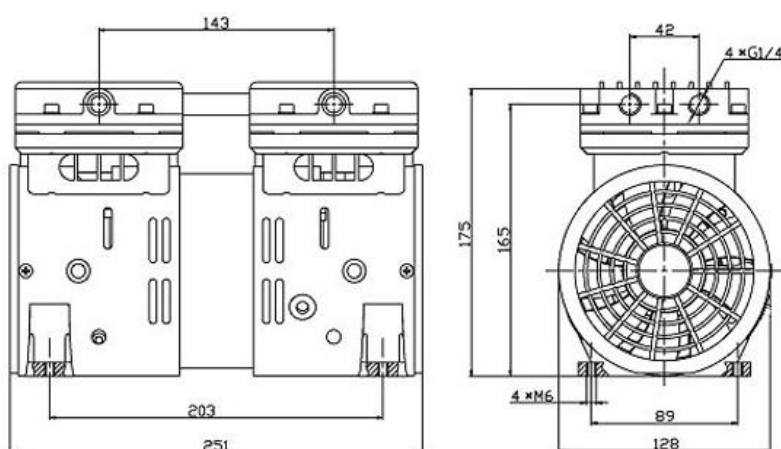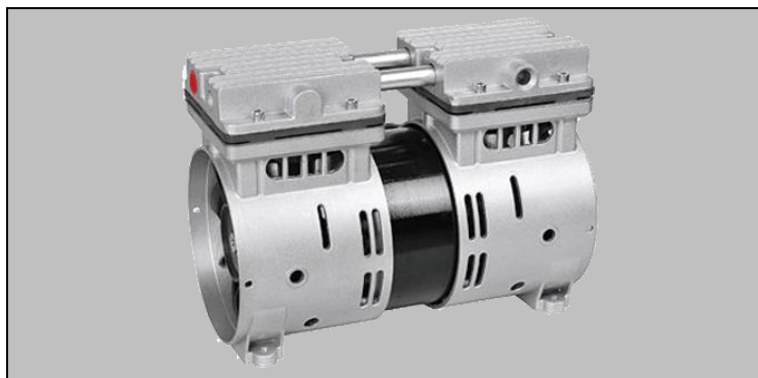

Technical Data		TYPE EVPP-D03	
		Vacuum	Pressure
Nominal displacement	l/m	80	80
Ultimate vacuum/pressure	bar	-0,92	+2,0
Motor power	W	245	350
Rotation speed @50Hz	rpm	1450	1400
Weight	kg	7,5	7,5
Noise (at ultimate pressure)	dB(A)	60	62
Admissible ambient temp.	°C	-5 to 40	-5 to 40
Connections	G(BSP)	1/4"	1/4"
Dimensions LxWxH	mm	251x128x175	251x128x175

Ordering Information	EVPP-D03	
EVPP-D03 with 230V, 50Hz motor	670.030	675.030
Damper G1/4"	670.900	
Accessories	See accessories page	



TYPE EVPP-D04

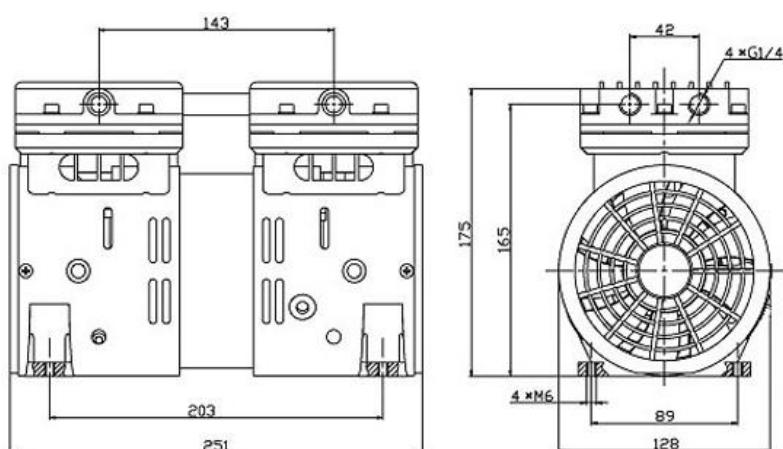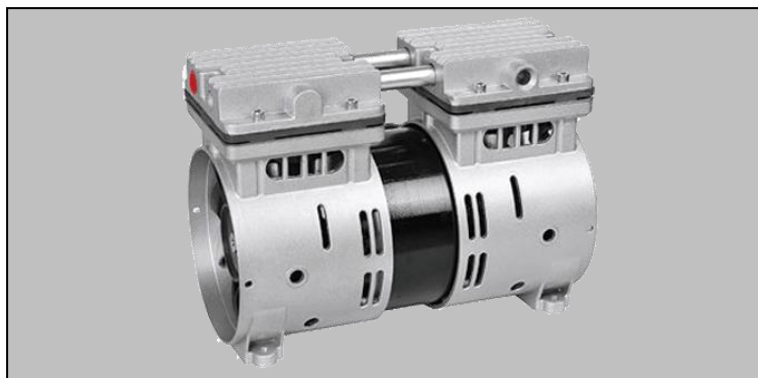

Technical Data		TYPE EVPP-D04	
		Vacuum	Pressure
Nominal displacement	l/m	102	102
Ultimate vacuum/pressure	bar	-0,92	+2,0
Motor power	W	275	380
Rotation speed @50Hz	rpm	1450	1400
Weight	kg	7,5	7,5
Noise (at ultimate pressure)	dB(A)	60	62
Admissible ambient temp.	°C	-5 to 40	-5 to 40
Connections	G(BSP)	1/4"	1/4"
Dimensions LxWxH	mm	251x128x175	251x128x175

Ordering Information	EVPP-D04	
EVPP-D04 with 230V, 50Hz motor	670.031	675.031
Damper G1/4"	670.900	
Accessories	See accessories page	



TYPE EVPP-D05

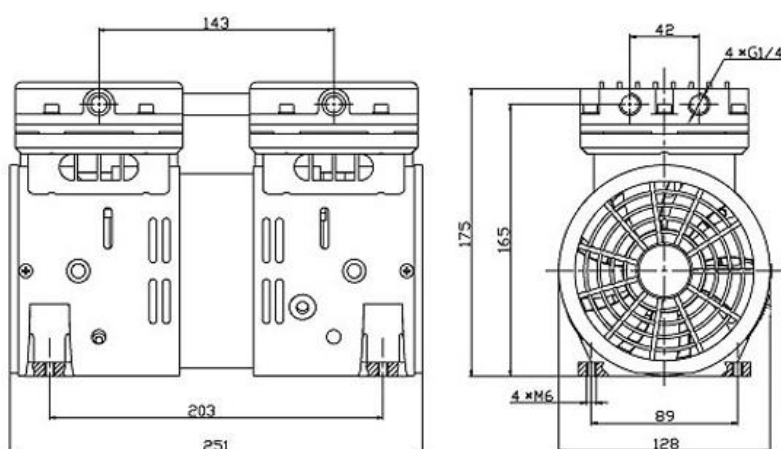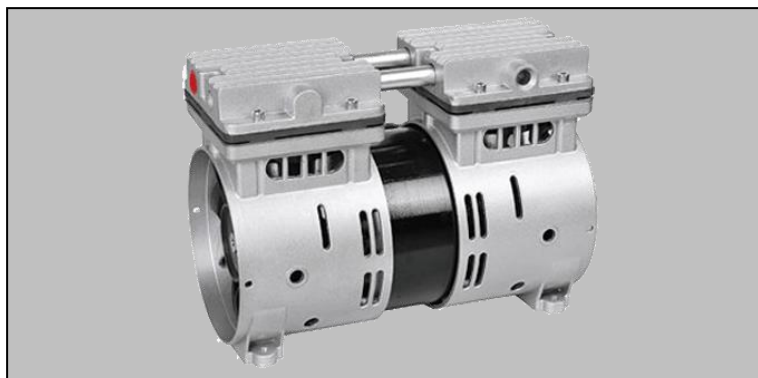

Technical Data		TYPE EVPP-D05	
		Vacuum	Pressure
Nominal displacement	l/m	118	118
Ultimate vacuum/pressure	bar	-0,92	+2,0
Motor power	W	330	480
Rotation speed @50Hz	rpm	1450	1400
Weight	kg	8,5	8,5
Noise (at ultimate pressure)	dB(A)	60	62
Admissible ambient temp.	°C	-5 to 40	-5 to 40
Connections	G(BSP)	1/4"	1/4"
Dimensions LxWxH	mm	251x128x175	251x128x175

Ordering Information	EVPP-D05	
EVPP-D05 with 230V, 50Hz motor	670.032	675.032
Damper G1/4"	670.900	
Accessories	See accessories page	



TYPE EVPP-D06

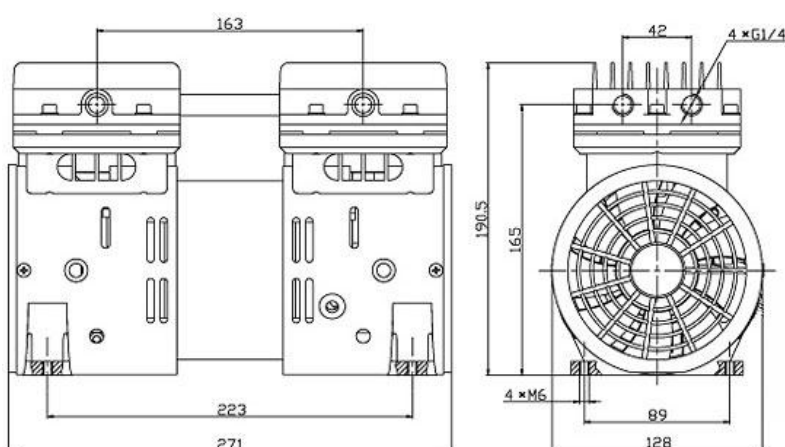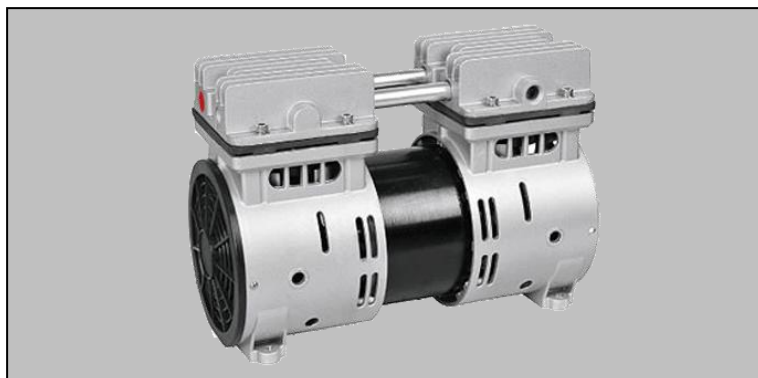

Technical Data		TYPE EVPP-D06	
		Vacuum	Pressure
Nominal displacement	l/m	51,7	102
Ultimate vacuum/pressure	bar	-0,98	+7,0
Motor power	W	320	560
Rotation speed @50Hz	rpm	1450	1380
Weight	kg	9,0	9,0
Noise (at ultimate pressure)	dB(A)	60	64
Admissible ambient temp.	°C	-5 to 40	-5 to 40
Connections	G(BSP)	1/4"	1/4"
Dimensions LxWxH	mm	271x128x191	271x128x191

Ordering Information	EVPP-D06	
EVPP-D06 with 230V, 50Hz motor	670.033	675.033
Damper G1/4"	670.900	
Accessories	See accessories page	


TYPE EVPP-D07

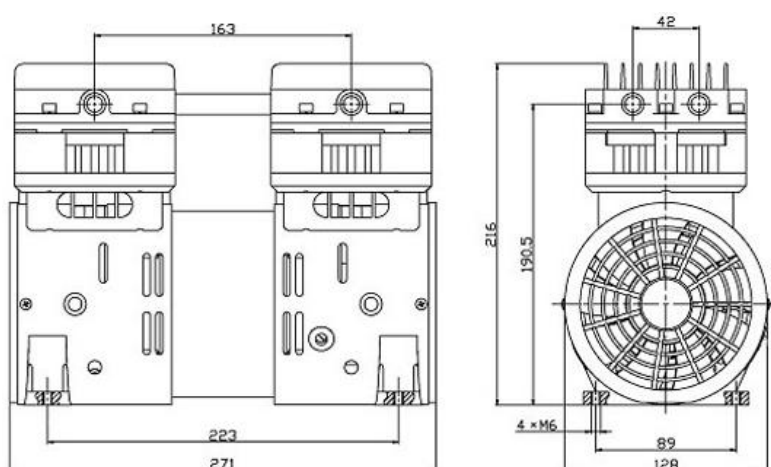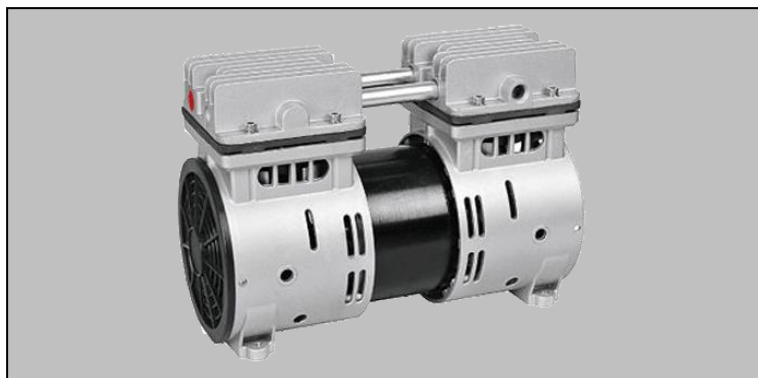

Technical Data		TYPE EVPP-D07	
		Vacuum	Pressure
Nominal displacement	l/m	68,3	135
Ultimate vacuum/pressure	bar	-0,98	+7,0
Motor power	W	430	780
Rotation speed @50Hz	rpm	1450	1380
Weight	kg	10,0	10,0
Noise (at ultimate pressure)	dB(A)	60	64
Admissible ambient temp.	°C	-5 to 40	-5 to 40
Connections	G(BSP)	1/4"	1/4"
Dimensions LxWxH	mm	271x128x216	271x128x216

Ordering Information	EVPP-D07	
EVPP-D07 with 230V, 50Hz motor	670.034	675.034
Damper G1/4"	670.900	
Accessories	See accessories page	


TYPE EVPP-D08

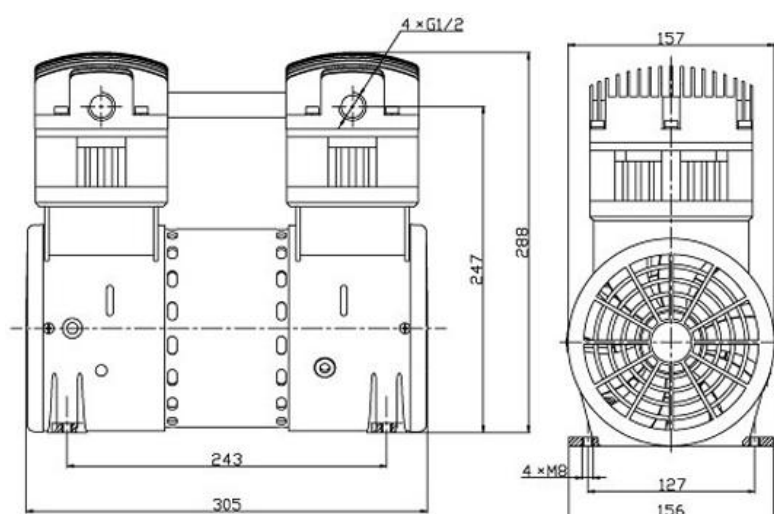

Technical Data		TYPE EVPP-D08	
		Vacuum	Pressure
Nominal displacement	l/m	100	200
Ultimate vacuum/pressure	bar	-0,98	+8,0
Motor power	W	600	1100
Rotation speed @50Hz	rpm	1450	1380
Weight	kg	17,0	17,0
Noise (at ultimate pressure)	dB(A)	65	70
Admissible ambient temp.	°C	-5 to 40	-5 to 40
Connections	G(BSP)	1/2"	1/2"
Dimensions LxWxH	mm	305x156x288	305x156x288

Ordering Information	EVPP-D08	
EVPP-D08 with 230V, 50Hz motor	670.035	675.035
Damper G1/2"	670.901	
Accessories	See accessories page	


TYPE EVPP-D09

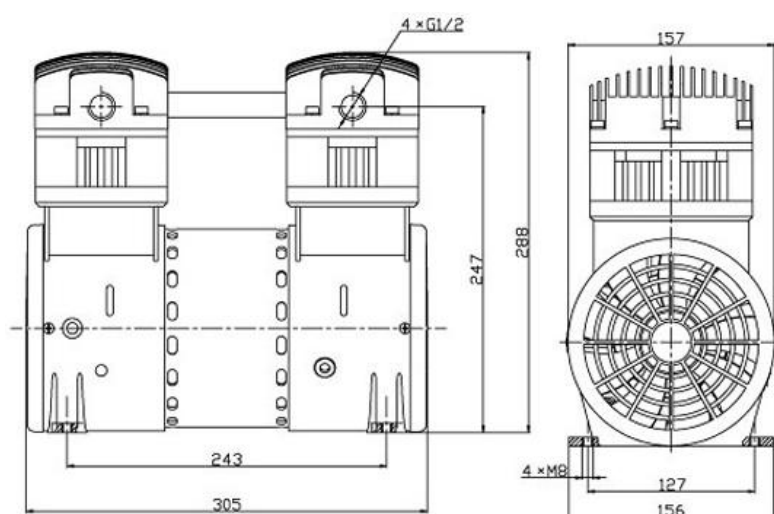

Technical Data		TYPE EVPP-D09	
		Vacuum	Pressure
Nominal displacement	l/m	140	280
Ultimate vacuum/pressure	bar	-0,98	+8,0
Motor power	W	750	1350
Rotation speed @50Hz	rpm	1450	1380
Weight	kg	17,5	17,5
Noise (at ultimate pressure)	dB(A)	65	70
Admissible ambient temp.	°C	-5 to 40	-5 to 40
Connections	G(BSP)	1/2"	1/2"
Dimensions LxWxH	mm	305x156x288	305x156x288

Ordering Information	EVPP-D09	
EVPP-D09 with 230V, 50Hz motor	670.036	675.036
Damper G1/2"	670.901	
Accessories	See accessories page	


TYPE EVPP-S06

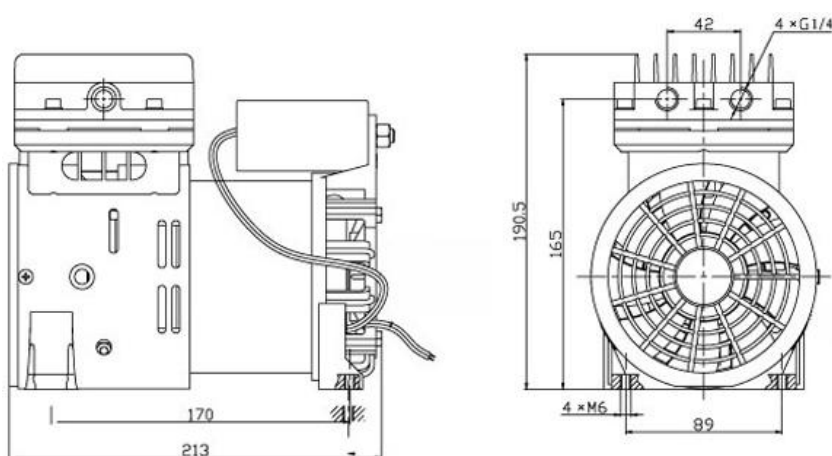

Technical Data		TYPE EVPP-S06	
		Vacuum	Pressure
Nominal displacement	l/m	51,7	51,7
Ultimate vacuum/pressure	bar	-0,91	+7,0
Motor power	W	300	450
Rotation speed @50Hz	rpm	1450	1400
Weight	kg	7,0	7,0
Noise (at ultimate pressure)	dB(A)	63	68
Admissible ambient temp.	°C	-5 to 40	-5 to 40
Connections	G(BSP)	1/4"	1/4"
Dimensions LxWxH	mm	213x128x191	213x128x191

Ordering Information	EVPP-S06	
EVPP-S06 with 230V, 50Hz motor	670.033S	675.033S
Damper G1/4"	670.900	
Accessories	See accessories page	


TYPE EVPP-S07

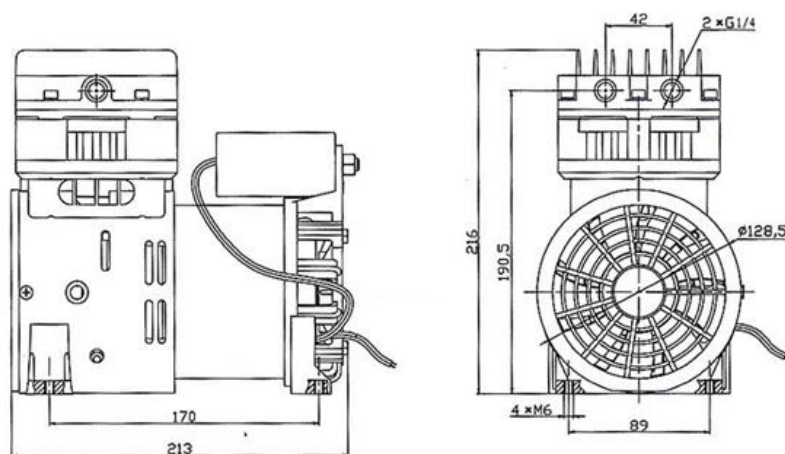

Technical Data		TYPE EVPP-S07	
		Vacuum	Pressure
Nominal displacement	l/m	68,3	68,3
Ultimate vacuum/pressure	bar	-0,91	+7,0
Motor power	W	350	500
Rotation speed @50Hz	rpm	1450	1380
Weight	kg	8,5	8,5
Noise (at ultimate pressure)	dB(A)	63	68
Admissible ambient temp.	°C	-5 to 40	-5 to 40
Connections	G(BSP)	1/4"	1/4"
Dimensions LxWxH	mm	213x128x216	213x128x216

Ordering Information	EVPP-S07	
EVPP-S07 with 230V, 50Hz motor	670.034S	675.034S
Damper G1/4"	670.900	
Accessories	See accessories page	



TYPE EVPP-S08

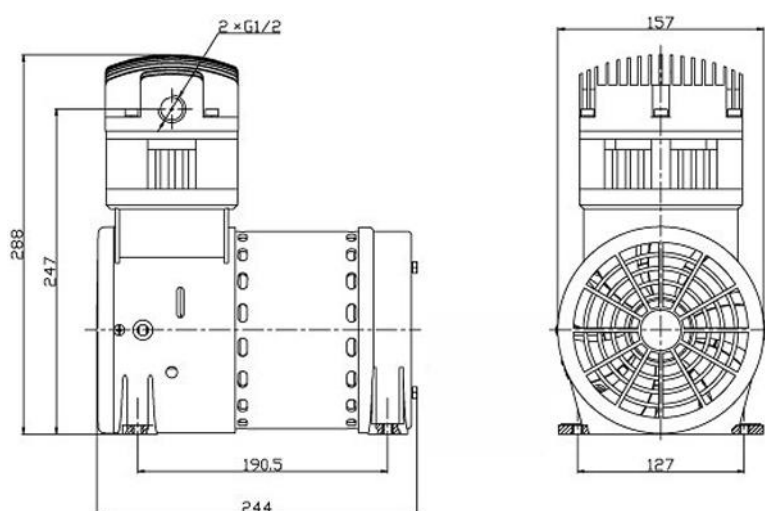

Technical Data		TYPE EVPP-S08	
		Vacuum	Pressure
Nominal displacement	l/m	100	100
Ultimate vacuum/pressure	bar	-0,91	+8,0
Motor power	W	550	820
Rotation speed @50Hz	rpm	1450	1380
Weight	kg	12,0	12,0
Noise (at ultimate pressure)	dB(A)	65	70
Admissible ambient temp.	°C	-5 to 40	-5 to 40
Connections	G(BSP)	½"	½"
Dimensions LxWxH	mm	244x157x288	244x157x288

Ordering Information	EVPP-S08	
EVPP-S08 with 230V, 50Hz motor	670.035S	675.035S
Damper G½"	670.901	
Accessories	See accessories page	

TYPE EVPP-S09

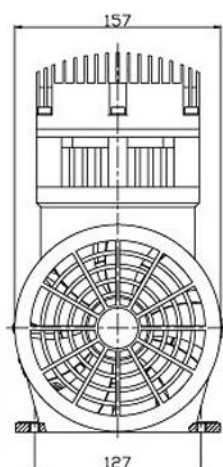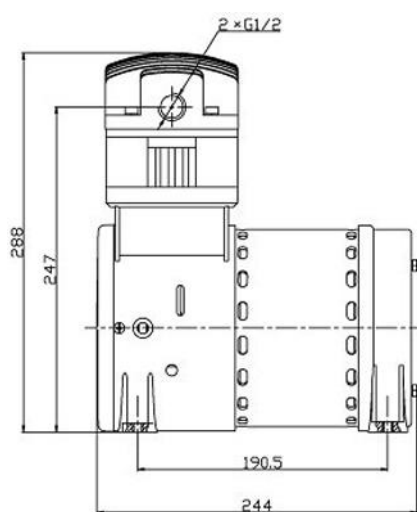

Technical Data		TYPE EVPP-S09	
		Vacuum	Pressure
Nominal displacement	l/m	140	140
Ultimate vacuum/pressure	bar	-0,91	+8,0
Motor power	W	650	950
Rotation speed @50Hz	rpm	1450	1380
Weight	kg	12,5	12,5
Noise (at ultimate pressure)	dB(A)	65	70
Admissible ambient temp.	°C	-5 to 40	-5 to 40
Connections	G(BSP)	½"	½"
Dimensions LxWxH	mm	244x157x288	244x157x288

Ordering Information	EVPP-S09	
EVPP-S09 with 230V, 50Hz motor	670.036S	675.036S
Damper G½"	670.901	
Accessories	See accessories page	