

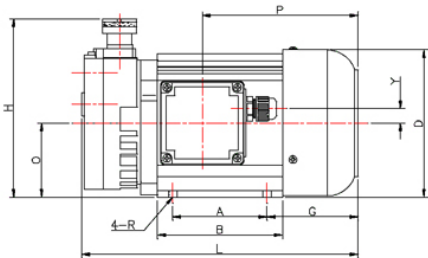



TYPE VRT4.04

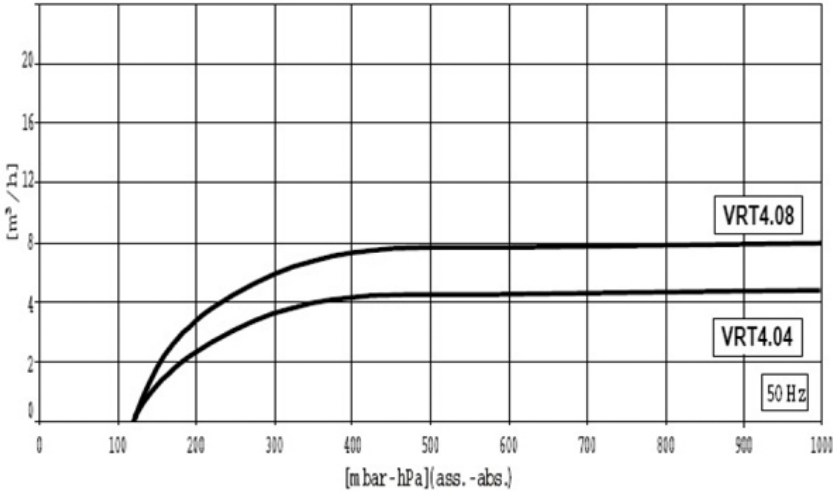

Dimensions	A	B	C	D	E	F	G	H	J	K	L	M
VRT4.04	80	106	202	125	100	116	77	151	154	75	234	92
	N	O	P	R	S	T	U	W	Y	Z	TS	
VRT4.04	126	63	132	Ø7	6	24	16	12	12	15	G ¼	





TYPE VRT4.04

Technical Data		TYPE VRT4.04	
		50 Hz	60 Hz
Nominal displacement	m ³ /h	4,0	4,8
Ultimate pressure	mbar	150	
Vanes		long life carbon vanes	
Cooling type		air cooling	
Power	kW	0,18	0,22
Nominal speed	rpm	1400	1700
Noise level	dB(A)	59	61
Operating temperature*	°C	70 - 73	75 - 80
Ambient temperature	°C	0 - 40	
Weight	kg	7,5	
Connection Inlet	G(BSP)	¼"	

*at ambient temperature 20°C

Ordering Information	TYPE VRT4.04	
	50/60 Hz	
Single phase motor 230V, 50/60 Hz (IEC)	641.404	
Three phase motor 400V, 50Hz (IEC)	643.404	
Other Voltages/Frequencies	Upon request	
Spare parts:		
Set of vanes	640.113	
Maintenance kit	640.199	
Exhaust filter cartridge	640.198	

TYPE VRT4.08

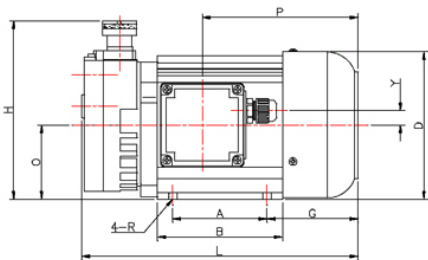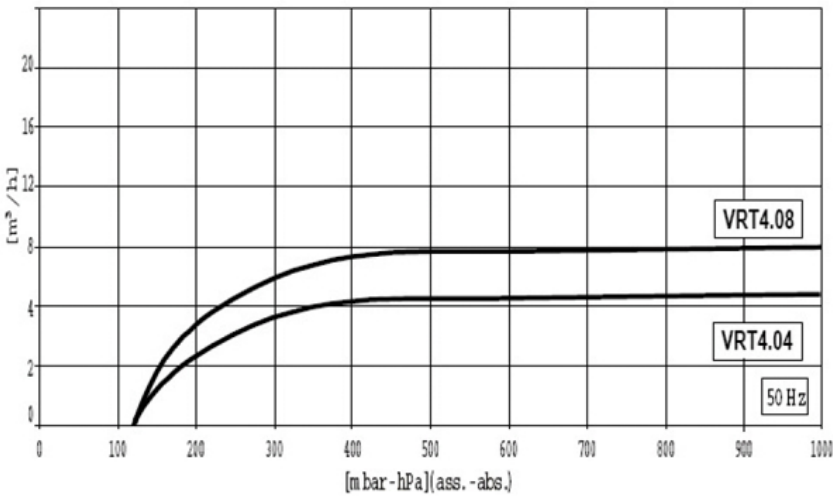

Dimensions	A	B	C	D	E	F	G	H	J	K	L	M
VRT4.08	80	106	209	125	100	116	77	158	155	79	244	93
	N	O	P	R	S	T	U	W	Y	Z	TS	
VRT4.08	133	63	132	Ø7	6	24	16	12	12	15,5	G 3/8	

Technical Data		TYPE VRT4.08	
		50 Hz	60 Hz
Nominal displacement	m ³ /h	8,0	9,6
Ultimate pressure	mbar	150	
Vanes		long life carbon vanes	
Cooling type		air cooling	
Power	kW	0,35	0,42
Nominal speed	rpm	1400	1700
Noise level	dB(A)	60	61
Operating temperature*	°C	70 - 73	72 - 75
Ambient temperature	°C	0 - 40	
Weight	kg	12	
Connection	Inlet G(BSP)	3/8"	

*at ambient temperature 20°C

Ordering Information	TYPE VRT4.08	
	50/60 Hz	
Single phase motor 230V, 50/60 Hz (IEC)	641.408	
Three phase motor 400V, 50Hz (IEC)	643.408	
Other Voltages/Frequencies	Upon request	
Spare parts:		
Set of vanes	640.213	
Maintenance kit	640.299	
Exhaust filter cartridge	640.298	