


TYPE EVM-S3.6



Pumpdown time for 20 ltr vessel

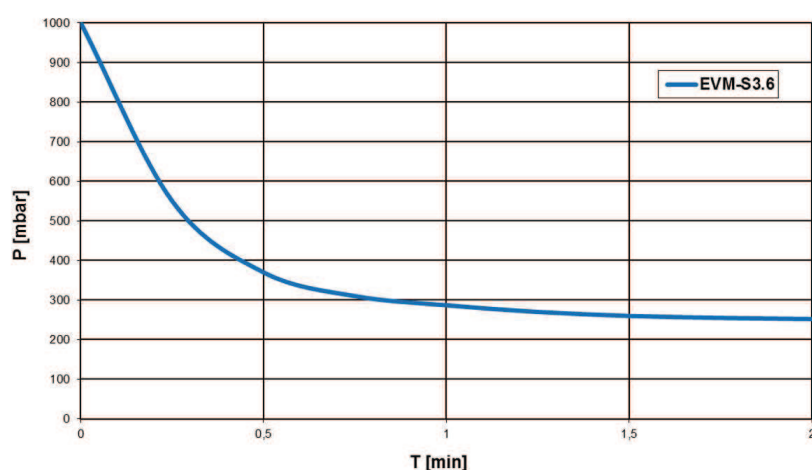

Technical Data		EVM-S3.6	EVM-S3.6C
		Standard version	Chemical version
Nominal displacement	m ³ /h	3,6	
Ultimate pressure	mbar	250	
Motor power	W	250	
Material Diaphragm & Valves		HNBR	PTFE
Material Pump Head		none	PTFE coated
Weight	kg	9	
Noise level	dB	< 50	
Admissible ambient temp.	°C	10 to 40	
Connections	mm	6	
Dimensions LxWxH	mm	282x155x210	

Ordering Information	EVM-S3.6	EVM-S3.6C
Single phase motor 220-240V, 50 Hz (IEC)	626000	626100
Accessories	See page 9	